



## Sample Kit Contents

KEMET Part Number	Capacitance Value (µF)	Dimensions in mm			Lead Spacing (p)	Resistance (Ω)	Quantity
		B	H	L			
P410QM223M300AH101	0.022	7.3	13.0	18.5	15.2	100	10
P410QS333M300AH101	0.033	8.5	14.3	18.5	15.2	100	10
P410CJ473M300AH101	0.047	9.0	15.0	24.0	20.3	100	10
P410CP683M300AH101	0.068	11.3	16.5	24.0	20.3	100	10
P410EE104M300AH101	0.1	10.6	16.1	30.5	25.4	100	10

## Dimensions – Millimeters

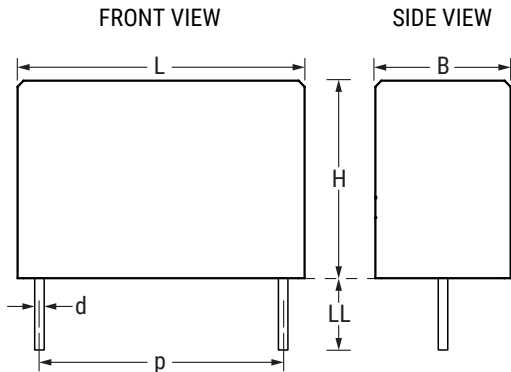

[www.kemet.com/P410](http://www.kemet.com/P410)

Size Code	p		B		H		L		d	
	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance
QM	15.2	±0.4	7.3	Maximum	13.0	Maximum	18.5	Maximum	0.8	±0.05
QS	15.2	±0.4	8.5	Maximum	14.3	Maximum	18.5	Maximum	0.8	±0.05
CJ	20.3	±0.4	9.0	Maximum	15.0	Maximum	24.0	Maximum	0.8	±0.05
CP	20.3	±0.4	11.3	Maximum	16.5	Maximum	24.0	Maximum	0.8	±0.05
EE	25.4	±0.4	10.6	Maximum	16.1	Maximum	30.5	Maximum	1.0	±0.05

**Note:** See Ordering Options Table for lead length (LL) options.