


DETAIL Z  
SCALE 20:1

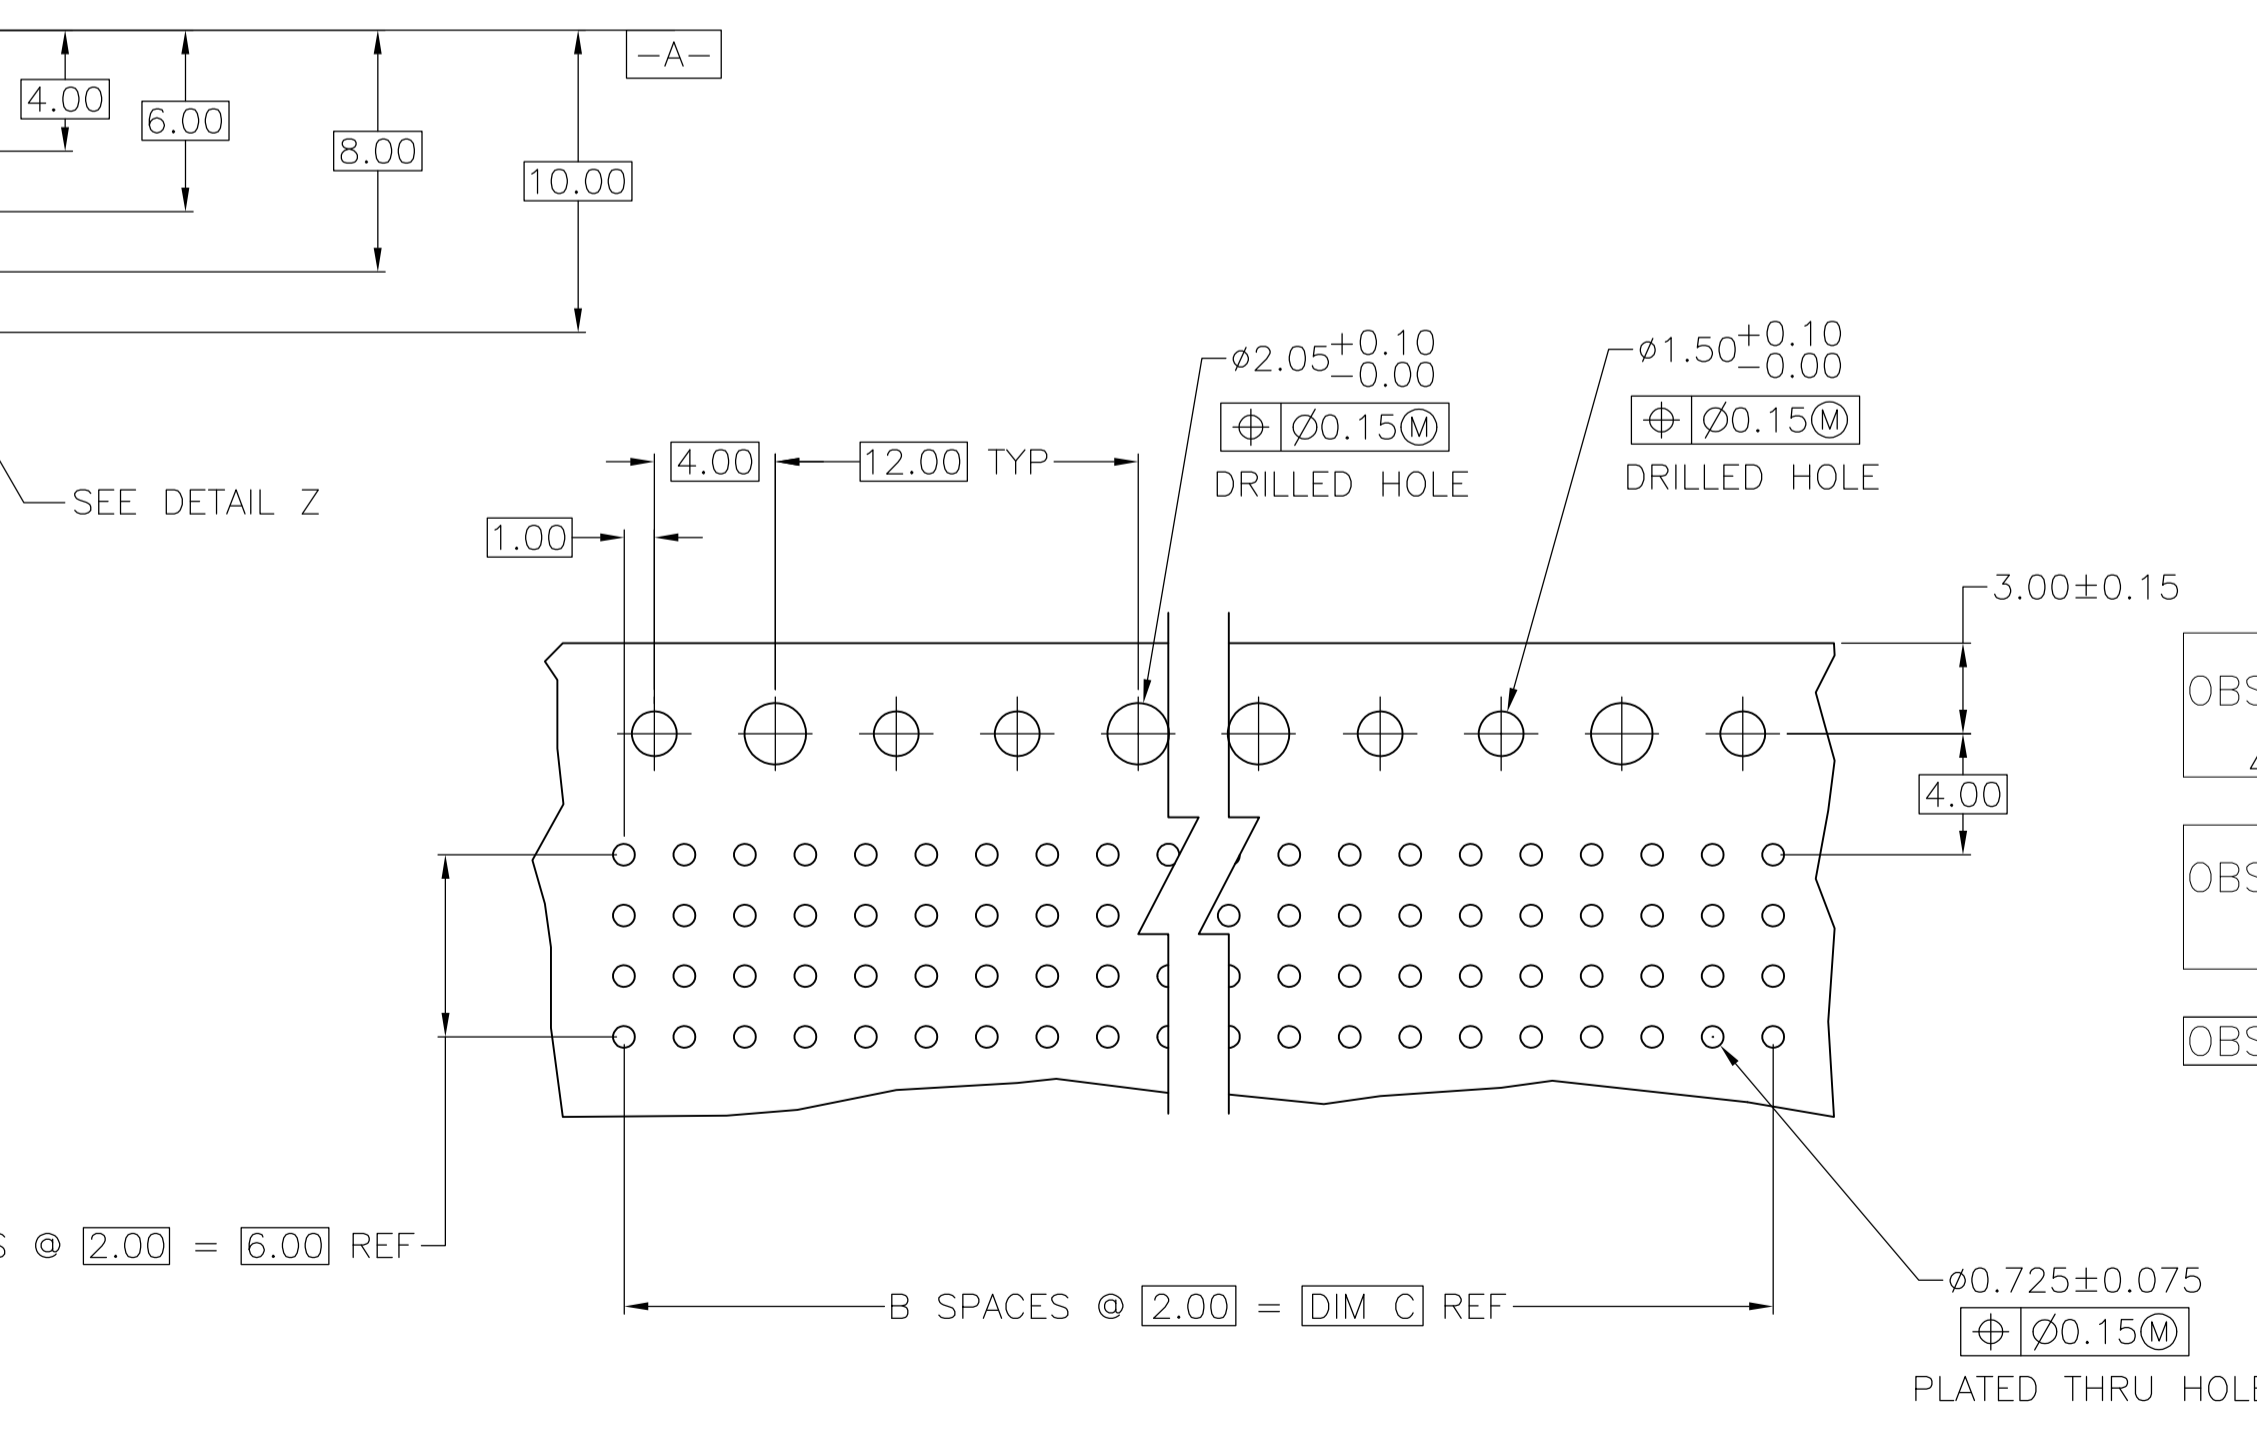

- △ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER ASTM D5138 LCP000 G30A 32250, COLOR: NATURAL.
- △ CONTACT MATERIAL: PHOSPHOR-BRONZE.
- △ CONTACT FINISH:  
UNDERPLATE (ENTIRE CONTACT) - 0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290.  
ON MATING SURFACES- CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA UNCONTROLLED ENVIRONMENT  
ON LEADS- 0.0006 MIN TIN PER ASTM B 545, OVER UNDERPLATE  
LUBRICATION (MIN MATING SURFACES) SURFACE CONDITIONER AFTER PLATING.
- △ PART MARKING, LOCATED APPROXIMATELY AS SHOWN.
- △ CONTACT FINISH:  
UNDERPLATE (ENTIRE CONTACT) - 0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290.  
ON MATING SURFACES- 0.00076 MIN NICKEL OR COBALT HARDENED GOLD PER ASTM B-488 OVER UNDERPLATE.  
ON LEADS- 0.0006 MIN TIN PER ASTM B 545, OVER UNDERPLATE  
LUBRICATION (MIN MATING SURFACES) SURFACE CONDITIONER AFTER PLATING.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

|                  |     |     |    |        |            |             |                        |
|------------------|-----|-----|----|--------|------------|-------------|------------------------|
| OBSOLETE<br>△6   | NO  | 46  | 23 | 47.88  | △5         | 96          | <del>3=5536511=3</del> |
|                  | NO  | 22  | 11 | 23.88  | △5         | 48          | <del>3=5536511=2</del> |
| OBSOLETE<br>△6   | YES | 10  | 5  | 11.88  | △5         | 24          | <del>3=5536511=1</del> |
|                  | NO  | 34  | 17 | 35.88  | △3         | 72          | <del>1=5536511=2</del> |
| OBSOLETE<br>△6   | NO  | 130 | 65 | 131.88 | △3         | 264         | <del>1=5536511=1</del> |
|                  | NO  | 106 | 53 | 107.88 | △3         | 216         | <del>1=5536511=0</del> |
| OBSOLETE<br>△6   | NO  | 118 | 59 | 119.88 | △3         | 240         | <del>5536511=9</del>   |
|                  | NO  | 82  | 41 | 83.88  | △3         | 168         | 5536511-8              |
| POSITIONING PEGS | NO  | 66  | 33 | 67.88  | △3         | 136         | <del>5536511=7</del>   |
|                  | NO  | 58  | 29 | 59.88  | △3         | 120         | 5536511-6              |
|                  | NO  | 70  | 35 | 71.88  | △3         | 144         | 5536511-5              |
|                  | NO  | 94  | 47 | 95.88  | △3         | 192         | 5536511-4              |
|                  | NO  | 46  | 23 | 47.88  | △3         | 96          | 5536511-3              |
|                  | NO  | 22  | 11 | 23.88  | △3         | 48          | 5536511-2              |
|                  | YES | 10  | 5  | 11.88  | △3         | 24          | 5536511-1              |
|                  | C   | B   | A  | FINISH | NO OF POSN | PART NUMBER |                        |

RECOMMENDED CIRCUIT PATTERN  
PER IPC-D300 TYPE II, CLASS C  
(COMPONENT SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.

|                  |  |                          |                      |                    |   |
|------------------|--|--------------------------|----------------------|--------------------|---|
| DIMENSIONS: mm   | TOLERANCES UNLESS OTHERWISE SPECIFIED: | DIN B1 MCMASITER 31AUG04 | APVD R WERTZ 31AUG04 | NAME               | RCPT. ASSY, SIGNAL MODULE, Z-PACK 2mm FB<br>4 ROW, 3.55mm PRESS FIT LEAD LENGTH |
| 0 PLC ± -        | 1 PLC ± -                              | 2 PLC ± .13              | 3 PLC ± -            | 4 PLC ± -          | APPLICATION SPEC  |
| ANGLES ± -       |  |                          |                      |                    | SIZE CAGE CODE DRAWING NO   |
| MATERIAL         | FINISH                                 | WEIGHT                   |                      | A1 00779 C=5536511 | RESTRICTED TO   |
| CUSTOMER DRAWING |  | SCALE 4:1                | SHEET 1 of 1         | REV C              |   |